

INSTALLATION INSTRUCTIONS

Chevrolet/GMC/Cadillac
Tahoe, Yukon, Escalade

TruckVault Inc
(800) 967-8107
www.truckvault.com



Tools Required:

Short Phillips screwdriver
13mm Socket & ratchet

Materials Included:

2 - M8 x 55mm
2 - 5/16 x 1 1/4 fender washer
2 - Tie down straps


Personnel Required: Two (2) people

Congratulations! You now own the finest secure cargo bed storage system on today's market. Enjoy the confidence you'll experience when traveling with your valuables safely locked in your TruckVault.

1. Open the TruckVault drawers just far enough reach in and unscrew the rubber stoppers attached to the underside of the top. Now completely remove the drawers and set aside. To remove drawers with slides, pull out far enough to expose the black slide locks on each side. Lift up on the slide locks and pull the completely out.




2. Open the lid of the cargo storage tray. Remove the rubber mat & hold down bolts in the bottom of the tray. Relocate the jack from it's storage compartment on the drivers side cargo panel. The truckvault will block the access to this panel.

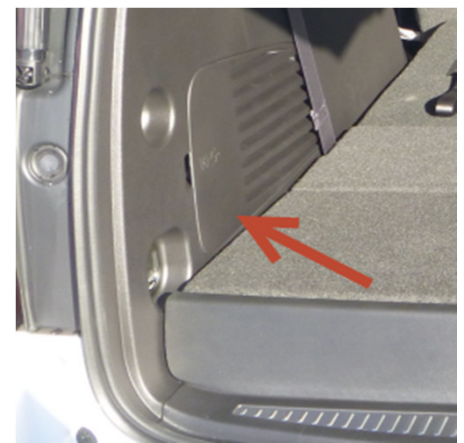

3. Carefully slide the TruckVault into the cargo area of your vehicle.

4. Locate the holes in the bottom of the Vault with the tabs (A) in the bottom of the Cargo area. Install the M8 bolts and fender washers through the holes in the bottom of the vault. Do not over-tighten, just snug.

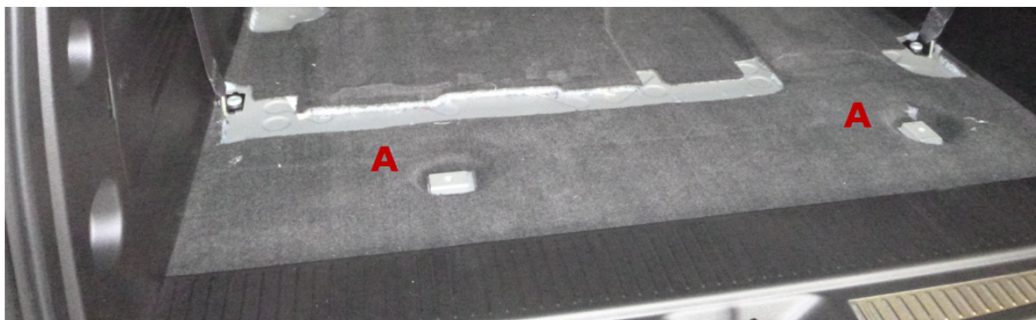

Tie-Down Strap Instructions

To ease installation and provide a safe and simple method of securing your Vault to the cargo area of your vehicle, we have provided this tie-down strap. It only takes a moment to install, and provides an extra measure of safety.



1. Loop the end of the strap through a seat latch, or bracket that is secured to the floor of the vehicle.
2. Feed the snap hook through the loop in the end of the strap. Pull snap hook & cam buckle all the way through.



3. Hook the end of the snap hook onto the D-ring on the back of the Vault.
4. Pull snug to tighten the Vault to the floor of the vehicle. Fold seats back into the normal position.



Note: If the seat does not want to catch, you may have to pull the strap away from the middle of the seat latch. You may have to use force to latch the seat which will also tighten the strap.



Note: Specific installation may vary according to your model of Vault and vehicle make, model and year. Use whichever method gives you the easiest installation while providing the most secure and safe attachment. The Vault should be sturdy & the straps tight at the end of installation. Please call us with any questions or concerns.